

Side:	3021-3022		
Date:	14.12.07	Date:	31.01.2025
Utf.:	TEN	Utf.:	NOTASM
Kfr.:	RBA	Kfr.:	NOENVA
Rev.:	00	Rev.:	01

SAMMENDRAG

ARMERINGSLISTER

HELE LENGDER (m)

Diameter		8	10	12	14	16	20	25	32	Sum kg
Stål- kvalitet										

KAPPET LENGDER (m)

Diameter		8	10	12	14	16	20	25	32	Sum kg
Stål- kvalitet	B500NC			58,4		266,0	5,8	184,2		1219,6

SUM (KG): 1219,6


KAPPET OG BØYD LENGDER (m)

Diameter		8	10	12	14	16	20	25	32	Sum kg
Stål- kvalitet	B500NC			231,1		196,3				525,1

SUM (KG): 525,1

TOTAL SUM (KG): 1744,7

Side: 3021	Date: 14.12.07	Date: 31.01.25
Utf.: TEN	Off.: NOTASM	
Kfr.: RBA	Kfr.: NOENVA	
Teignr.: K03-2		
Rev.: 00	Rev.: 01	

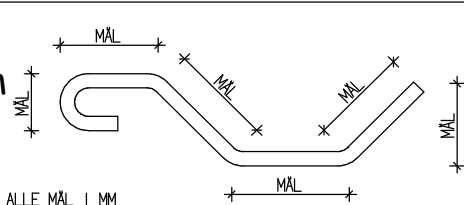LANDBRUKSVEGBRU TYPE 3
BETONGPLATEBRU SPENN 2,0m


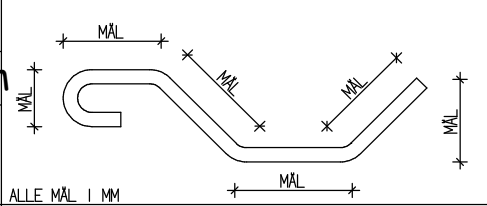
Pos Nr.	Stål-kval.	Diam mm	Ant. stk.	Kapp-lengde mm	Samlet lengde m		Rev	MERKNAD
P1	B500NC	16	22	4490	98,8			
P2	B500NC	16	20	3650	73,0			
P3	B500NC	25	29	3030	87,9			
P4	B500NC	16	29	2950	85,6			
P5	B500NC	20	4	1450	5,8			
P6	B500NC	12	46	1867	85,9			Bøy dor D = 32 mm
P7	B500NC	12	58	1777	103,1			Bøy dor D = 32 mm
P8	B500NC	16	58	3385	196,3			Bøy dor D = 32 mm Må tilpasses bruas helning i lengderetningen.
P9	B500NC	25	24	3650	87,6			
P10	B500NC	12	12	1317	15,8			Bøy dor D = 32 mm





LENGDESAMMENDRAG I M

Diameter i mm	8	10	12	14	16	20	25	32	nett M ²
Stål-kvalitet	B500NC		204,8		453,6	5,8	175,5		

Side: 3022	Date: 14.12.07	Date: 31.01.25
Utf.: TEN	Off.: NOTASM	
Kfr.: RBA	Kfr.: NOENVA	
Tegn.nº: K03-2		
Rev.: 00		Rev.: 01

LANDBRUKSVEGBRU TYPE 3
BETONGPLATEBRU SPENN 2,0m



Pos Nr.	Stål-kval.	Diam mm	Ant. stk.	Kapp-lengde mm	Samlet lengde m		Rev	MERKNAD
P11	B500NC	12	16	3650	58,4			
P12	B500NC	25	6	1450	8,7			
P13	B500NC	16	6	1450	8,7			
P14	B500NC	12	20	1317	26,3			Bøy dor D = 32 mm

LENGDESAMMENDRAG I M

Diameter i mm	8	10	12	14	16	20	25	32	nett M ²
Stål-kvalitet	B500NC		84,7		8,7		8,7		